



Display Case Audit Procedure - LottoShield PDA Scanner

Display Case Audits must:

- Be performed **at least once per day**
Recommended: beginning of each shift and again before day report close
- Include **all packs in the display case** across **all display cases**
- Be completed **without interruption**


Important Notes:

- A **single roll direction** (low → high or high → low) must be used **consistently**
- **Do not scan new packs as they are loaded in the display case**
Only scan when performing a full display case audit


1. Tap **Audit Display Case**.



2. Begin scanning **all packs** in the display case(s) with your device's laser scanner.

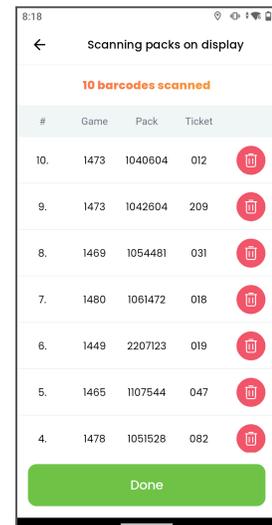

3. Tap **Done** and **Submit**.

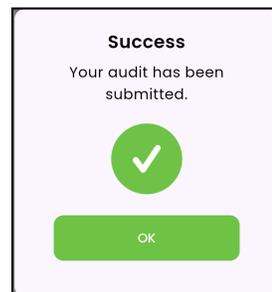

4. Success. Click **OK**.